


Turbo Speed Sensor

Part No. 901243

- The speed sensor thread is 3/8-24
- There are 3 wires present:
 - Red = power
 - Black = ground
 - White = signal
- Instruction for Use:
 - Remove the Allen head bolt using a 7/32 allen wrench from the CHRA (see red circled area in image below)
 - Insert the sensor bolt, screwing in gently until it "bottoms out" and then back off a 1/2 turn.
 - Lock down the nut.
- Note: The sensor triggers off of 2 flats on the turbine shaft, per revolution

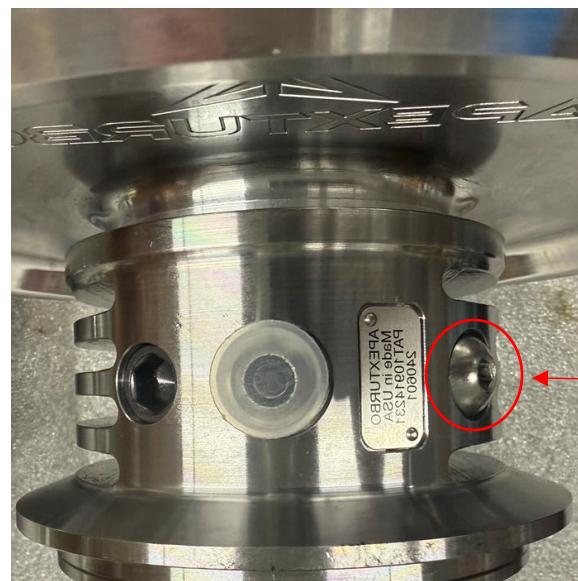

SPEED SENSOR
ALLEN HEAD BOLT